



Interglo Lighting Up/Down profile system ideal for linear LED lighting applications. Accessories for surface, recessed, trimless and pendant applications.





Variety of accessories for different corner and line extensions.

Special design and construction to meet the most demanding lighting designs.

# GEO PS5075N SERIES

## GEO ARCHITECTURAL

### linear lighting

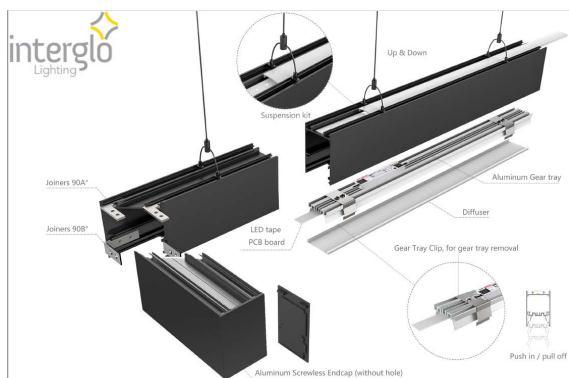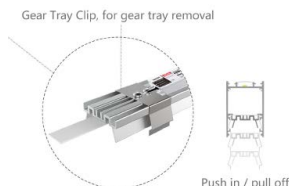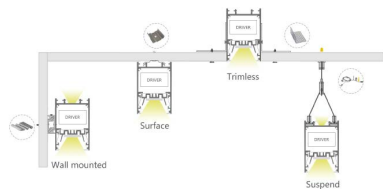

## Specifications

### Colour

White    Black    Silver    Custom

### Light Source - Direct

Tridonic Stark LLE24 HE / HO G5

Output\* /W per Meter

\*Fitting lumens at 4000K

High Efficiency Boards

350mA | 15.9W/m | 1435Lm/m  
 400mA | 18.3W/m | 1607Lm/m  
 450mA | 20.9W/m | 1778Lm/m  
 500mA | 22.7W/m | 2110Lm/m

High Output Boards

200mA | 17.3W/m | 1821Lm/m  
 250mA | 21.7W/m | 2239Lm/m  
 300mA | 26.2W/m | 2614Lm/m  
 350mA | 31W/m | 3032Lm/m  
 400mA | 35.6W/m | 3471Lm/m

Galaxy Flex 2835 28W/M 24V DC

### Colour Temp

3000K    4000K    CCT Adjustable

### Dimming

Non Dim    DALI / DSI / Switch Dim    1-10V    Phase Cut

### Mounting Options

Surface Mount    Suspended    Wall Mounted  
 Recessed

### Light Source Indirect

Galaxy Pro 24V DC LED Tape

### Diffuser Type

9.6 W/M    Opal  
 20W/M    Micro Prismatic UGR<19  
 28W/M  
 Not Required

## Project Details

Project Name

Fitting Type