



Interglo Lighting aluminium profile system ideal for linear LED lighting applications. Accessories for surface mounted and suspended applications. There is also a recessed version of this profile available. Variety of accessories for different corner and line extensions. Special design and construction to meet the most demanding lighting designs.

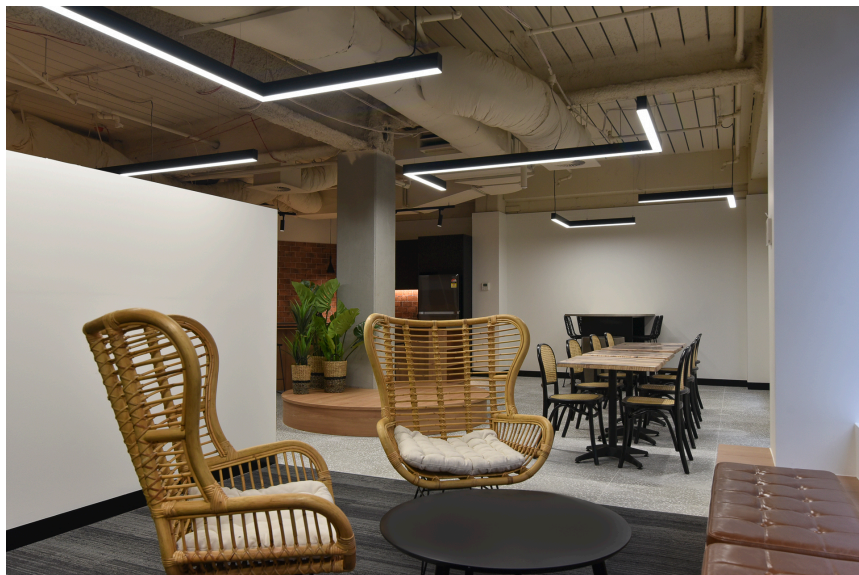

GEO PS6090 SERIES

GEO ARCHITECTURAL

linear lighting



Specifications

Colour

White Black Silver Custom

Colour Temp

3000K 4000K CCT Adjustable

Light Source

Tridonic Stark LLE24 HE / HO G5

Output* /W per Meter

*Fitting lumens at 4000K

High Efficiency Boards

350mA | 15.9W/m | 1435Lm/m
 400mA | 18.3W/m | 1607Lm/m
 450mA | 20.9W/m | 1778Lm/m
 500mA | 22.7W/m | 2110Lm/m

High Output Boards

200mA | 17.3W/m | 1821Lm/m
 250mA | 21.7W/m | 2239Lm/m
 300mA | 26.2W/m | 2614Lm/m
 350mA | 31W/m | 3032Lm/m
 400mA | 35.6W/m | 3471Lm/m

Dimming

Non Dim DALI / DSI / Switch Dim 1-10V

Mounting Options

Surface Mount Suspended Wall Mounted
 Recessed

Project Details

Project Name

Fitting Type