
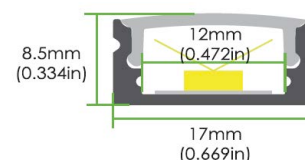


Interglo Lighting aluminium profile system ideal for pelmet lighting, and installation into joinery. Paired with Galaxy Pro LED strip, this product is ideal in retail, and hospitality environments

GEO S1708

GEO ARCHITECTURAL

linear lighting

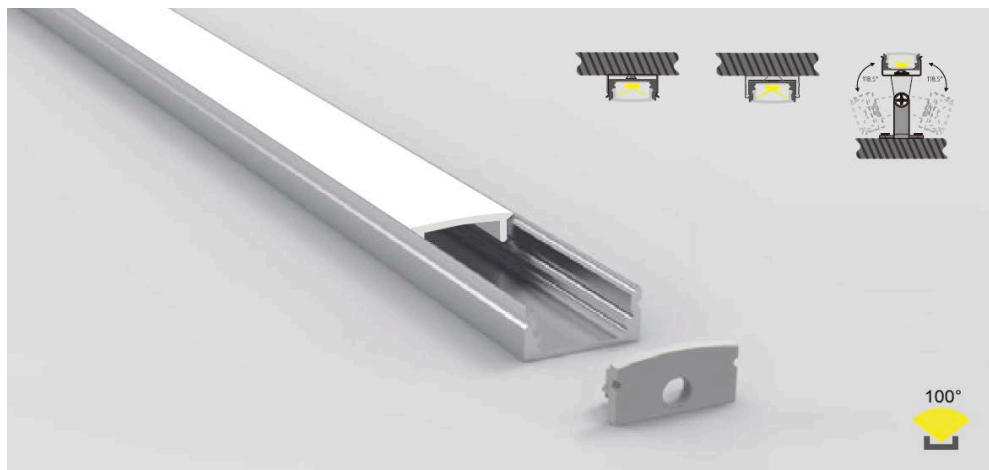

Specifications

Colour	Silver	Black	Custom
End Caps	Yes	No	

LED Tape

Galaxy Pro 2110-3500-2700K | 6000K

Width	8mm
Voltage	24V DC
LED Qty	350 LEDs/M
Cut Increment	20mm

Options

Colour Temp	2700K	3000K	4000K	6000K
	Other			
Power	5W/m	9.6W/m	15W/m COB	20W/m
IP Rating	IP20	IP65	IP67	

LED Outputs

3000K - 5W 444LM | 9.6W 852LM | 15W COB 1034LM | 20W 1776LM
 4000K - 5W 458LM | 9.6W 880LM | 15W COB 1100LM | 20W 1833LM
 6000K - 5W 490LM | 9.6W 940LM | 15W COB 1160LM | 20W 1950LM

Driver Options

Dimming

- Non Dim
- DALI/Switch Dim
- 1-10V
- Phase Cut

Project Details

Project Name

Fitting Type