

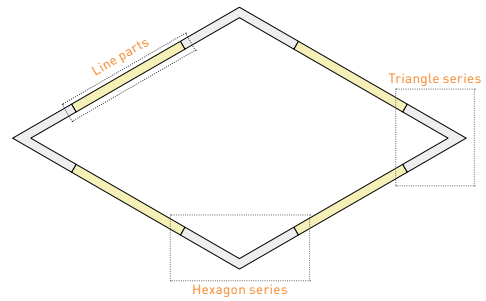


Case 1: if the length < 1.5m, profile & PC cover is only 1 part.

Case 2: if the length  $\geq$  1.5m, profile is connected by parts.



## Accessories



a/mm	b/mm	c/mm
		900
40		1000
50		1100
60		1200
70		1300
80	300	1400
90	400	1500
100		1600
110		1700
120		1800
150		1900
		2000
		2200
		2400

Ordering code for Rhombus series - <1.5m

\*Lumens @4000K, CRI 80

Model	Item	Size/mm	Power/W 1 pcs	Lumens /lm	Dimming	CCT	CRI	Input /VAC	Color	Certification
LCXX60	LC4060-R-849	H60xW490xL849	15	1500	Non Dali Triac 0-10V Tunable	3000K 4000K 6000K	>80 >90 >95	200-240 100-277	White Black Silver Gold	CE CB SAA RCM RoHS
	LC4060-R-1024	H60xW591xL1024	18	1800						
	LC4060-R-1200	H60xW693xL1200	20	2000						
	LC6060-R-849	H60xW490xL849	30	3000						
	LC6060-R-1200	H60xW693xL1200	50	5000						
LCXX80	LC4080-R-849	H80xW490xL849	15	1500						
	LC4080-R-1024	H80xW591xL1024	18	1800						
	LC4080-R-1200	H80xW693xL1200	20	2000						
	LC6080-R-849	H80xW490xL849	30	3000						
	LC6080-R-1200	H80xW693xL1200	50	5000						
LCXX100	LC50100-R-849	H100xW490xL849	15	1500						
	LC50100-R-1024	H100xW591xL1024	18	1800						
	LC50100-R-1200	H100xW693xL1200	20	2000						
	LC60100-R-849	H100xW490xL849	30	3000						
	LC60100-R-1200	H100xW693xL1200	50	5000						

More shapes available

Connectors

