The Taurus fitting from our Shapes range has the flexibility to be small and sleek, to alarge and significant feature in the larger sizes profiles.

This system can be suspended, surface mounted or recessed, and can be manufactured in a range of outputs, LED colours and dimming types.

The fittings are available in a range of powder coated, or anodised colours.




### Specifications

			-	
	1-			-
T	12	11		3
		<b>b</b> • •		5
			2	



# Taurus Shapes Series GEO ARCHITECTURAL

### linear lighting

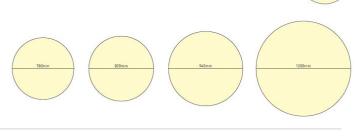

#### Colour Temp

White	Black	Silver Other	3000K	4000K	CCT Adj	RGB	Othe	эr
Direct Ligh <sup>.</sup>	ting		Dimming					
Required		Not Required	Non Dim	DALI / [	DSI / Switch Di	m 1-10V	Phase Cut	
Indirect Lig	Inting		Mounting	Options				
Required		Not Required	Surface	Mount	Suspendec	Recesse	ed (Trimless)	

#### Fitting Size Size

Colour

Depth							
60mm	80mm	100mm	120mm				
Diameter							
370mm	1500LM	370mm	n   2000LM	520mm   3500LM	540mm   4000LM	660mm   6000LM	780mm   8000LM
820mm	9000LM	940mm	12000LM	1200mm   20000LM			

## Project Details

Project Name

Fitting Type