



Sleek aluminium pendant capable of both up, and down lighting. Available in a range of custom finishes.

Also available as a wall mounted, up down fitting.

# GEO P25120 GEO ARCHITECTURAL

## linear lighting

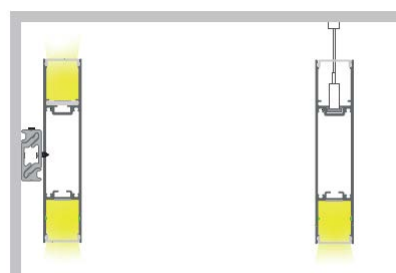

## Specifications

Colour	Silver	Black	Custom	Mounting	Suspended	Wall Mounted
End Caps	Yes	No				

### Options

### LED Tape

**Galaxy Pro 2110-500-2700K | 6000K**

Width	8mm
Voltage	24V DC
LED Qty	350 LEDs/M
Cut Increment	20mm

Colour Temp	2700K	3000K	4000K	6000K
	Other			

Power	5W/m	9.6W/m	20W/m	28W/m
Power	5W/m	9.6W/m	20W/m	28W/m

### LED Outputs

3000K - 5W 444LM | 9.6W 852LM | 20W 1776LM | 28W 2486LM  
 4000K - 5W 458LM | 9.6W 880LM | 20W 1833LM | 28W 2566LM  
 6000K - 5W 490LM | 9.6W 940LM | 20W 1950LM | 28W 2730LM

## Driver Options

### Dimming

Non Dim	DALI/Switch Dim	1-10V	Phase Cut
---------	-----------------	-------	-----------

## Project Details

Project Name

Fitting Type