

The S1 surface mounted downlight can be surface mounted, or suspended.


With a variety of beam angles available, it can be used on a variety of ceiling heights, and for different applications



SI.09801

ARCHITECTURAL

Downlights

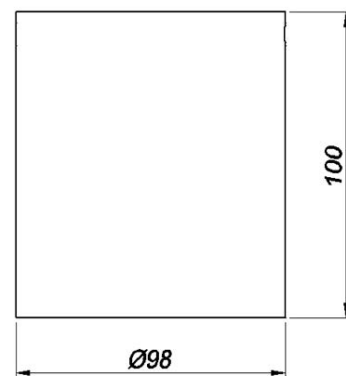

Specifications

Fitting Options

Colour

White Black

IP Rating

IP20

Module Options

Module Power

15W 1950 lm 20W 2600lm

Colour Temp

2700K 3000K 4000K

Dimming

Non Dim DALI / DSI / Switch Dim Phase Cut

Reflector

24Deg 40Deg 60Deg

Project Details

Project Name

Fitting Type